

PP




PVDF



TECHNICAL DATA

Inlet connections	2" f
Outlet connections	1"1/4 m
Max. Flow rate	23,5 m3/h
Max. Delivery head	20 mts
Max Viscosity	200 CPS
Temperature PP	-5°C +65°C
Temperature PVDF	-10°C +90°C
Impeller	closed

PERFORMANCE

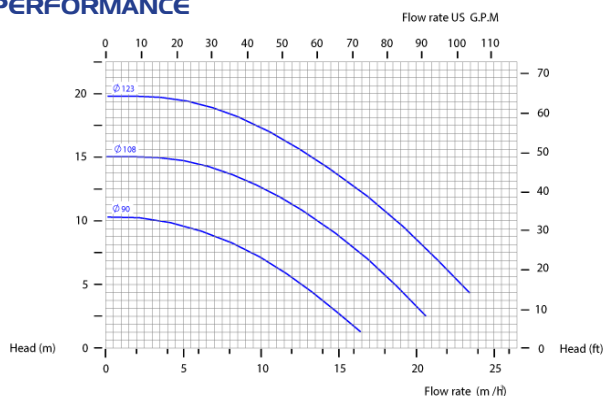

The curves and performance values refer to pumps with free delivery outlet with water at 20 °C, and two poles motor 50 Hz. These data may vary according to the construction materials and hydraulic conditions.


SPECIFIC GRAVITY TABLE

IMPELLER	1,1 KW	1,5 KW
Ø 123 mm	up to 1	up to 1,1
Ø 108 mm	up to 1,2	up to 1,5
Ø 90 mm	up to 1,5	up to 1,8

MOTOR SPECIFICATION

SIZE	Kw	RPM
IEC 80	1,1	2 poles - 2900
IEC 80	1,5	2 poles - 2900

DIMENSIONS

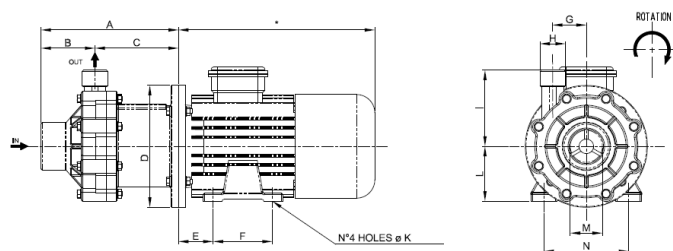

A	B	C	D	E	F	G	H	I	L	M	N	K
231	81	150	200	50	100	62,5	1"-1/4	125	80	2"	125	9,5

*Depend on the manufacturer

COMPOSITION

MODEL	CASING	O RING	BUSHING+SHAFT	IMPELLER	CONNECTIONS	MOTOR VERSION
CM15	P = PP K = PVDF	D = EPDM V = VITON	TA = PTFEC + ALLUMINA 99,7%	123 = Ø 123 mm STD 108 = Ø 108 mm 90 = Ø 90 mm	1 = BSP STD 2 = FLANGED	IE = IEC FLANGE